

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

|  |  |  |  |
|--|--|--|--|
| (51) International Patent Classification <sup>7</sup> :<br><b>H04Q 7/22, 7/38</b>  |  | A1   | (11) International Publication Number: <b>WO 00/01173</b>      |
|  |  |  | (43) International Publication Date: 6 January 2000 (06.01.00) |
| (21) International Application Number: <b>PCT/FI99/00564</b>   |  | (81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). |  |
| (22) International Filing Date: 24 June 1999 (24.06.99)  |  | <p><b>Published</b></p> <p><i>With international search report.</i></p> <p><i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p> <p><i>In English translation (filed in Finnish).</i></p>  |  |
| (30) Priority Data:<br>981485 26 June 1998 (26.06.98) FI   |  |  |  |
| (71) Applicant (for all designated States except US): <b>NOKIA NETWORKS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).</b>  |  |  |  |
| (72) Inventors; and<br>(75) Inventors/Applicants (for US only): <b>VERKAMA, Markku [FI/FI]; Hakamäki 2 A 12, FIN-02120 Espoo (FI). AH-MAYVAARA, Kalle [FI/FI]; Ruostekuja 3 D 24, FIN-01610 Vantaa (FI). PERÄLÄ, Timo [FI/FI]; Vuorenpaikontie 3 A 46, FIN-00820 Helsinki (FI). HARTIKAINEN, Jari [FI/FI]; Metsärinne 7 B, FIN-04220 Kerava (FI).</b>  |  |  |  |
| (74) Agent: <b>PATENT AGENCY COMPATENT LTD.; Pitkäsillanranta 3 B, FIN-00530 Helsinki (FI).</b>  |  |  |  |
| (54) Title: <b>MANAGEMENT OF PACKET SWITCHED CONNECTIONS IN A COMMUNICATION NETWORK</b>  |  |  |  |
| (57) Abstract  |  |  |  |
| <p>In connection-oriented switching of packet data in known mobile communications systems, resources of the transmission path between the serving node (SGSN) and the radio network subsystem (RNS) and memory resources of the radio network subsystem are reserved unnecessarily due to the burst-like nature of packet data. Thus the transmission network's limited address space and the radio network subsystem's management resources are consumed. The invention concerns such connection management in a mobile communications system, which is suitable for packet-switched data transmission. The method according to the invention is characterized in that the logical connection between the serving node (SGSN) and the radio network subsystem (RNS) is released, so that the logical connection between the serving node (SGSN) and the mobile station (MS) remains, and the released logical connection is reconnected, when relaying of user data starts.</p> |  |  |  |
| <pre> sequenceDiagram     participant MS     participant RNS     participant SGSN      MS-&gt;&gt;RNS: 31. Attach     RNS-&gt;&gt;SGSN: 32. PDP Context Act     RNS-&gt;&gt;SGSN: 33. Bearer request/assignment     MS-&gt;&gt;RNS: 34. Data     RNS-&gt;&gt;SGSN: 34. Data     RNS-&gt;&gt;SGSN: 35.     RNS-&gt;&gt;SGSN: 56. Release MM     RNS-&gt;&gt;SGSN: 57. Release     RNS-&gt;&gt;SGSN: 58. Reconnect MM     RNS-&gt;&gt;SGSN: 59. Bearer request   </pre>  |  |  |  |

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

|    |                          |    |  |    |  |    |                          |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania                  | ES | Spain                                    | LS | Lesotho                                      | SI | Slovenia                 |
| AM | Armenia                  | FI | Finland                                  | LT | Lithuania                                    | SK | Slovakia                 |
| AT | Austria                  | FR | France                                   | LU | Luxembourg                                   | SN | Senegal                  |
| AU | Australia                | GA | Gabon                                    | LV | Latvia                                       | SZ | Swaziland                |
| AZ | Azerbaijan               | GB | United Kingdom                           | MC | Monaco                                       | TD | Chad                     |
| BA | Bosnia and Herzegovina   | GE | Georgia                                  | MD | Republic of Moldova                          | TG | Togo                     |
| BB | Barbados                 | GH | Ghana                                    | MG | Madagascar                                   | TJ | Tajikistan               |
| BE | Belgium                  | GN | Guinea                                   | MK | The former Yugoslav<br>Republic of Macedonia | TM | Turkmenistan             |
| BF | Burkina Faso             | GR | Greece                                   | ML | Mali   | TR | Turkey                   |
| BG | Bulgaria                 | HU | Hungary                                  | MN | Mongolia                                     | TT | Trinidad and Tobago      |
| BJ | Benin                    | IE | Ireland                                  | MR | Mauritania                                   | UA | Ukraine                  |
| BR | Brazil                   | IL | Israel                                   | MW | Malawi                                       | UG | Uganda                   |
| BY | Belarus                  | IS | Iceland                                  | MX | Mexico                                       | US | United States of America |
| CA | Canada                   | IT | Italy                                    | NE | Niger  | UZ | Uzbekistan               |
| CF | Central African Republic | JP | Japan                                    | NL | Netherlands                                  | VN | Viet Nam                 |
| CG | Congo                    | KR | Kenya                                    | NO | Norway                                       | YU | Yugoslavia               |
| CH | Switzerland              | KG | Kyrgyzstan                               | NZ | New Zealand                                  | ZW | Zimbabwe                 |
| CI | Côte d'Ivoire            | KP | Democratic People's<br>Republic of Korea | PL | Poland                                       |    |                          |
| CM | Cameroon                 | KR | Republic of Korea                        | PT | Portugal                                     |    |                          |
| CN | China                    | KZ | Kazakhstan                               | RO | Romania                                      |    |                          |
| CU | Cuba                     | LC | Saint Lucia                              | RU | Russian Federation                           |    |                          |
| CZ | Czech Republic           | LJ | Liechtenstein                            | SD | Sudan  |    |                          |
| DE | Germany                  | LK | Sri Lanka                                | SE | Sweden                                       |    |                          |
| DK | Denmark                  | LR | Liberia                                  | SG | Singapore                                    |    |                          |
| EE | Estonia                  |    |  |    |  |    |                          |

## **Management of packet switched connections in a communication network**

### **Field of the invention**

- 5           The present invention concerns connection management in a mobile communications system suitable for packet switched data transmission.

### **Technical background**

- 10           Telecommunication networks can be divided into circuit switched and packet switched networks. In circuit switched networks, the transmission connection between the transmitting party and the receiving party is reserved before starting the transmission. It is a drawback of this connection method that the transmission connection is reserved even if no information is transmitted over the connection. In packet switched networks, transmission of  
15           packets may be connection-oriented or connectionless. In connectionless packet switched networks, the transmission network is common to all users. Information is transmitted in packets which contain information on their destination. Resources of the transmission network are not reserved in advance, nor are any packets transmitted when there is no information to be transmitted. In this way no transmission network capacity is reserved unnecessarily.  
20           In the connection-oriented packet switched technology, virtual circuits are formed for certain transmission routes between network elements and every packet of the connection is routed along the same route. Thus, the information is routed as in circuit switched networks, but no transmission capacity is  
25           unnecessarily reserved. E.g. the ATM (Asynchronous Transfer Mode) network is formed with the aid of virtual circuits.

- Accessing packet switched networks like the Internet is further possible in many ways. The pan-European GSM mobile communications system, which is based on time division multiple access TDMA, allows circuit  
30           switched connection to packet switched networks in a known manner, when an adaptation protocol (e.g. a point-to-point protocol, PPP) is used between the mobile station and the connection point located in the network. The GPRS service (General Packet Radio Service) defined in the GSM system also allows packet switched connection from mobile stations to packet data  
35           networks like the Internet. Figure 1 shows the simplified structure of the GPRS network. The serving GPRS support node SGSN contains mobility

management and safety functions of the mobile stations. Through the gateway GPRS support node GGSN the network transmits packet data to and receives packet data from a packet data network PDN. By way of the gateway node the GPRS network is also in connection with other networks, such as the Internet or an X.25 network. Both the gateway and the serving node contain IP routing functions. Base station subsystem BSS includes base station controller BSC and one or more base stations BS. Mobile station MS is in connection with a base station over the radio path. In addition, the network includes home location register HLR for permanent storing of subscriber information.

In the GPRS network, transmission of packets between the mobile station and the serving node is transparent from the viewpoint of the base station system, and no record relating to the mobile station's GPRS service is stored in the base station system. Instead, every serving node SGSN has context information about the mobile stations which it is serving. In the GPRS system, context information can be divided into mobility management MM and packet data protocol PDP information respectively. The mobility management will tell where the mobile station is located and in which state it is. Possible states of a mobile station registered with a GPRS system are the idle state, the standby state and the ready state. When in the idle state, the mobile station is passive and it is able to receive only the broadcast of the base stations, but no point-to-point packets can be transmitted between the mobile station and the network. In the ready state, the mobile station is able to receive packets without any call procedure. From the ready state the mobile station moves to the standby state after a certain non-activity period. From the standby state the mobile station returns to the ready state after a call from the network or for transmission of a packet. The move between idle state and active state takes place by GPRS Attach and GPRS Detach procedures. In the ready state, the network knows the location of the mobile station with one-cell precision. Each packet to the mobile station is routed individually with the aid of a cell identifier attached to the packet from the serving node to the correct base station. Thus, user information is transmitted between the network and the mobile station without any connection assigned between the base station system and the serving node SGSN.

Figure 2 shows a new third generation (3G) mobile communications system which is based e.g. on WCDMA (Wideband Code Division Mul-

multiple Access) technology. The 3G mobile communications system combines packet data transmission functionality with circuit switched communication. The serving node 3G SGSN corresponds to the serving node SGSN of the GPRS network, like the gateway node GGSN, which attends to connections with other packet data networks. Hereinafter in this application a serving node SGSN means the serving node of the 3G network. The mobile services switching centres 3G MSC attends to the routing of circuit switched traffic. The network may also be implemented without any mobile services switching centre 3G MSC. The subscriber information of mobile stations is stored permanently in home location register HLR and temporarily in visitor location register VLR located e.g. in connection with the mobile services switching centre, and in serving node SGSN. The radio network subsystem RNS includes a radio network controller RNC and at least one base station BS. The operation of the whole system is monitored by operation & maintenance system O&M.

In the third generation mobile communications system, the radio network subsystem must have information about mobile stations to be served over the radio interface, because the radio network subsystem allocates radio resources for the subscribers and it is able to combine both circuit switched and packet switched connections of the mobile station in the radio interface, using the same hash code when e.g. WCDMA technology is used. It has been proposed that connections over the  $I_u$  interface between the radio network and the main trunk should be connection-oriented due to the said combining and coding of circuit switched and packet switched traffic. In addition, a connection set-up to be made for the packet service allows advantageous transmission to the radio network subsystem of parameters describing the quality of the service (e.g. transmission rate, transmission delay). Without a connection set-up which takes place separately, these parameters must be added separately to each packet to be transmitted. A connection between the serving node and the radio network subsystem can be implemented e.g. with ATM in such a way that for each mobile station a virtual channel is reserved according to a certain ATM adaptation layer (e.g. ATM Adaptation Layer 5 AAL5 or ATM Adaptation Layer 2 AAL2).

In order to combine circuit switched and packet switched traffic in a radio network subsystem, it is preferable to unify the mobile station state management. For this reason, an idle state and an active state are proposed

as mobility management (MM) states of the mobile station registered with the 3G network. These states differing from the GPRS system are also natural states, when the transmission of packet data between the serving node and the radio network is connection-oriented, as presented above. In the idle state, the mobile station is only able to listen to the broadcast of base stations and to move into an active state through a procedure to be described later in connection with Figure 3. In the active state, the mobile station can transmit and receive data packets continuously. When the mobile station is in the active state, a communication connection has been set up between the serving node and the radio network and at least management resources are reserved for the mobile station in the radio network. Thus, each mobile station reserves network resources for use by itself in the active state. Of the presented 3G mobile communications system it is known to release limited radio resources during pauses in the packet data transmission, whereby the mobile station in the active state moves from the radio channel dedicated to the mobile station to a common radio channel, and the allocated radio resource can thus be released for other use. The connection between mobile station and base station is continued on the common channel, on which it is possible to transmit small data packets in both directions and to receive broadcast of the base station in the mobile station. When the packet data transmission is resumed, the radio network subsystem dedicates a new radio channel for the connection between base station and mobile station. The main trunk is not aware of this change of the used type of radio channel, so the mobile station's state remains active from the viewpoint of mobility management (MM).

Figure 3 shows signalling between a mobile station and a 3G mobile communication network in the beginning of a packet data transmission. To keep it simple, the figure does not show any state-of-the-art signalling between the mobile station and the radio network subsystem for setting up e.g. connections of lower layers. In the Attach procedure 31, the serving node SGSN e.g. fetches subscriber information of the mobile station from the home location register. After this procedure, the mobile station is able to transmit and receive short messages (SMS) and to listen to the broadcast of base stations, but the mobile station is not able to transmit or receive packet data, because no packet data address is yet available to it. Hereby the mobile station is in the idle state. In PDP Context activation procedure 32, a

packet data address is indicated to the mobile station, whereupon the mobile station will also be able to transmit and receive packet data. The mobile station has hereby moved into the active state. By the PDP Context activation procedure of the packet data protocol the mobile station is thus committed to a packet data address or to several addresses. Either the mobile station or the network can start this procedure. Before packet data is transmitted between the network and the mobile station, a connection-oriented communication connection is set up between serving node SGSN and radio network subsystem RNS by Bearer request/assignment procedure 33, wherein identifiers relating to the connection are transmitted, such as connection rate requirements and transmission delay requirements for the radio connection. After the communication connection has been set up between radio network subsystem RNS and serving node SGSN, it is possible to transmit packet data between the serving node SGSN and mobile station MS through radio network subsystem RNS (point 34).

In the operation of the third generation mobile communications system it is a problem as regards the transmission of packet data that resources of the transmission path between serving node SGSN and the radio network subsystem as well as memory resources of the radio network subsystem are reserved unnecessarily due to the burst-like character of packet data. Since a connection can be set up e.g. in the morning and end only in the evening, an address is reserved on the transmission path and connection management resources are reserved in the radio network subsystem for the whole day, even if no packets to be transmitted were to travel in the virtual circuit. Thus, a connection-oriented connection as described above for the serving node and the radio network subsystem consumes the transmission network's limited address space and the radio network subsystem's management resources.

### Summary of the invention

The objective of this invention is to save limited address space of the transmission network and to save management resources of the radio network subsystem.

This objective is achieved by a method and a mobile communications system in accordance with the invention, which are characterized by

that which is said in the independent claims. Advantageous embodiments of the invention are presented in the dependent claims.

The invention is based on the idea that the logical communication connection between the radio network and the serving node of the trunk network is released while the data transmission is inoperative, and this communication connection is again set up, when transmission of user data begins. The communication connection between the radio network and the serving node is released in such a way that the logical connection between the serving node and the mobile station will remain. If said communication connection between the serving node and the radio network was the mobile station's last connection, the mobile station will enter a 3 G idle state in accordance with the invention, which corresponds to the idle state of circuit switched services. While the communication connection is released in accordance with the invention, the mobile station keeps the packet data address, whereby a packet data transmission can be started to and from the mobile station. When the packet data transmission begins, a communication connection is again set up between the radio network and the serving node. In a first embodiment of the invention, the communication connection is released when the inactivity of data transmission has lasted for a predetermined period of time.

It is an advantage of this kind of connection management that the limited address space of the transmission network is saved, when the addresses of inactive connections are freed for other use, and the management resources of the radio network subsystem are saved.

25

#### **Brief description of the drawings**

The invention will now be described in connection with advantageous embodiments and referring to the examples shown in Figures 4-10 in the appended drawings, wherein:

30

Figure 1 is a block diagram of the GPRS system:

Figure 2 shows such parts of the 3G mobile communications system which are essential for the invention;

Figure 3 is a signalling diagram of the setting up of a packet data connection in the 3G mobile communications system;

35



- Figure 4 is a flow chart of a first embodiment of the method according to the invention;
- Figure 5 is a signalling diagram of the connection management according to the invention;
- 5 Figure 6 is a flow chart of a second embodiment of the method according to the invention;
- Figure 7 shows changes in state caused by the connection management according to the invention;
- Figure 8 shows the connection management according to the invention as a theoretical layer description;
- 10 Figure 9 is a block diagram of parts essential to the invention in a mobile communications system according to a first embodiment of the invention; and
- Figure 10 is a block diagram of parts essential to the invention in a mobile communications system according to a second embodiment of the invention.
- 15

#### **Detailed description of the invention**

20 The present invention can be applied in connection with any suitable mobile communications system. Hereinafter the invention is described more closely by way of example mainly in connection with a digital 3G mobile communications system with the focus on that part of the system which is intended for packet data transmission. Figure 2 shows the simplified structure of a 3G network which was described earlier.

25 In the following, the invention will be described in greater detail in the light of a first embodiment of the invention. Figure 4 is a flow chart of a first embodiment of the method according to the invention, wherein the idleness, that is, the non-activity of a mobile connection is measured by using a timer. At stage 41 a check is made of the non-activity of the user data traffic of a mobile station's communication connection. If no user data is transmitted on the connection, a timer is set at stage 42 at some suitable value, e.g. at zero or at a certain value, and the timer is started. Alternatively, the check at stage 41 can be left out, if the timer is always set and started after transmission and/or reception of a data packet. At stage 43 a check is made to see if

30 the idleness of the connection continues. If user data is transmitted on the connection, the process returns to stage 41 to monitor the beginning of the

35

idleness of the connection. If the connection is found to be idle in the check made at stage 43, a check is made at stage 44 to see if the timer has achieved the pre-set trigger value. Such a trigger value may be e.g. zero or some suitable value. If the timer has not yet achieved the trigger value, monitoring of the continued idleness of the connection goes on at stage 43. If the timer has achieved the trigger value at stage 44, the mobile station's communication connection between the radio network and the serving node is disconnected at stage 45, and management resources are possibly made free in the radio network, e.g. such records relating to the mobile station that may include information on transmission rate and transmission delay requirements of the service or on frame lengths and hash codes to be used at the radio interface. If one or more circuit switched connection events are taking place at the same time in the mobile station through the mobile services switching centre MSC, the disconnection of the communication connection started by the serving node SGSN will of course not affect the concerned circuit switched connection events. The user data's need for switching is checked at stage 46. When a need occurs to switch user data from the network to the mobile station or from the mobile station to the network, a communication connection is re-established (stage 47). After re-establishment of the connection, the process moves to the beginning of the flow chart to monitor the beginning of a new idleness period of the connection.

Figure 5 is a signalling diagram of the first embodiment of the invention. For the sake of simplicity, the figure does not show any such state-of-the-art signalling between the mobile station and the radio network subsystem, by which e.g. lower layer connections are set up. The procedures of stages 31-33 are carried out in a state-of-the-art manner, as was described earlier in connection with Figure 3. At stage 34 user data is switched in a state-of-the-art manner between mobile station MS and the serving node SGSN through the radio network subsystem RNS. Upon completion of the transmission of user data at stage 34 or in connection with transmission/reception of a data packet, the timer is set and it is started for the time of the idleness period of the mobile station's communication connection between the RNS and the SGSN (stage 55). If the idleness period goes on for a pre-established trigger value, signalling takes place between the mobile station MS and the serving node SGSN concerning temporary release of the MM layer in a Release MM procedure 56. The procedure 56 is not needed, if

both the network and the mobile station have a timer and the timers are synchronised with each other. After the triggering off of the timer or the performance of the Release MM procedure, disconnection takes place at stage 57 of the mobile station's communication connection between the radio network subsystem and the serving node, and management resources are possible made free in the radio network. The connection is disconnected as regards user data and signalling, or only as regards user data. The described temporary release of the MM layer will take place in case only one communication connection existed for the mobile station between the radio network and the serving node. If, on the other hand, the mobile station has several simultaneous communication connections between the radio network and the serving node, the Release MM procedure will not cause release of the MM layer, but the process goes on from stage 57 with a disconnection of the mobile station's communication connection. When a need occurs for switching of user data, re-establishment of the connection is signalled between mobile station MS and the serving node SGSN in a Reconnect MM procedure 58. The connection between radio network subsystem RNS and the serving node SGSN is re-established by a Bearer request procedure 59 known as such in the state of the art. The reconnect signalling 58 of the connection can be started either by mobile station MS or by the serving node SGSN, depending on the direction in which user data is relayed. In a state-of-the-art manner the packet is relayed at the radio interface from the base transceiver station to the mobile station MS using already reserved radio resources, or after the reservation of radio resources started by the call procedure or the mobile station, depending on the state of radio resources.

In the first embodiment of the invention, the timer and the trigger value can be set e.g. in such a way that disconnection of the connection is started after a ten-minute idleness period. The idleness period starting disconnection of the connection according to the invention can be set individually for the different connections, e.g. at some value between 1 and 10 minutes. In addition, the control of the timer's setting value may also depend on the subscribed service class. The timer may be located on the network side, preferably in connection with the serving node SGSN, or/and on the mobile station side. In the PDP Context activation procedure at stage 32 in Figure 5 it is also possible in accordance with the invention to negotiate about the timer's trigger value, if required. Alternatively, negotiation about the trigger

value may take place in connection with some other SM level procedure, when required, such as PDP Context modification or PDP Context deactivation, or the trigger value can be stated on the broadcast channel of the base station. It is not necessary to make the trigger value known to the mobile station.

In the second embodiment of the invention, disconnection of the connection between the radio network subsystem and the serving node SGSN is triggered off by a shortness of resources at the  $I_u$  interface. In the second embodiment of the invention, traffic monitoring is performed in the network in the same way as was described above in connection with the first embodiment of the invention. Figure 6 is a flow chart of a method according to the second embodiment of the invention. At stage 62 the activity of the mobile station's connection is monitored. At stage 63 the shortness of resources of the  $I_u$  interface between the radio network and the serving node is monitored. Alternatively, the sufficiency of resources can be checked in connection with the establishment of a new connection. If there are sufficient resources, the process returns to stage 62 to check the connection's activity. If there is a shortness of resources, the idle connection over the  $I_u$  interface is disconnected (stage 65), whereby the address used on the connection will be made free for other use. Such a connection is preferably disconnected, which has been non-active for the longest time or which has a low priority in relation to the other connections. At stage 66 a check is made of the need for switching of user data of the disconnected connection. When a need to switch user data occurs, the connection over the  $I_u$  interface is reconnected (stage 67). After reconnection of the connection, the process returns to the beginning of the flow chart to monitor the activity of the connection.

In a first manner of implementation of the third embodiment of the invention, the radio network subsystem RNS can prevent disconnection of a connection over the  $I_u$  interface. Such a functionality may be needed e.g. in a situation where a mobile station has transmitted to the radio network a data packet, which the radio network subsystem has received, but of the relaying of which the serving node does not yet know. When the SM protocol starts releasing resources of the  $I_u$  connection in accordance with the invention by the Release procedure 57 of Figure 5, RNS notifies SGSN that it does not accept the release. E.g. a 'data arriving' reason code or such may be attached to the notification. Hereby disconnection of the connection is inter-

rupted and it is possible to relay the data packet to the serving node. In this embodiment, the MM mobility management state is preferably changed from the active to the 3G idle state only after the disconnection of the  $I_u$  connection, so that the interrupted disconnection of the connection will not cause any change in the MM state. Otherwise, the functionality of this embodiment is similar e.g. to the functionality of the first or second embodiment described above or to a combination of the first and second embodiment.

5 In a second manner of implementation of the third embodiment of the invention, MS does not accept a change of the MM mobility management state to the active state as commanded by the serving node SGSN. Such a functionality may be needed e.g. in a situation where a mobile station has transmitted a data packet, of the switching of which the serving node, however, does not yet know. Hereby the SM protocol will not start any release of resources of the  $I_u$  connection.

15 In a third manner of implementation of the third embodiment of the invention, the serving node SGSN does not accept the change of the MM mobility management state to an active state as commanded by the mobile station MS. Such a functionality may be needed e.g. in a situation, where the serving node has transmitted a data packet, of the switching of which the mobile station, however, does not yet know. Hereby the SM protocol will not start any release of the resources of the  $I_u$  connection.

20 Figure 7 shows a change of the MM state of the connection as a result of the connection management according to the invention. In accordance with the state of the art, the mobile connection which has been changed into the active state, will go into the 3G idle state in accordance with the invention after the disconnection of the connection at stage 57 of Figure 5. From the 3G idle state the connection goes back to the active state e.g. after the re-establishment of the connection in accordance with stage 59 of Figure 5. A performance of a state-of-the-art PDP Context activation procedure will also return the mobile connection to the active state. Both states, the active state and the 3G idle state, keep the context active in the network.

30 Figure 8 shows a theoretical layer description of a connection in accordance with the invention, wherein protocols, which have the same names and which belong to units connected with one another, are communicating with each other. Of the protocols shown in the figure, the SM (Session management) performs session management, and the state-of-the-art SM-

procedures relating to this are e.g. PDP Context activation, PDP Context modification and PDP Context deactivation. The MM (Mobility Management) protocol performs management of the mobile station's location and state. A state-of-the-art MM procedure is e.g. location update. According to the invention, new functions are performed for the upper level protocol, in the case shown as an example in Figure 8 for the SM level protocol, such as traffic monitoring and, based on this, temporary disconnection of the MM connection, that is, management of the  $I_u$  interface. SM level procedures in accordance with the invention are the Release MM procedure 56 and the Reconnect MM procedure 58 of Figure 5. Lower level BM (Bearer Management) and RRM (Radio Resource Management) protocols attend to management of the transmission connection, while the TT (Transmission & Transport) protocol attends to management of the physical layer. The Release procedure 57 and Bearer request procedure 59 in accordance with the invention which are known as such are in accordance with the Bearer Management protocol. After disconnection of the connection over the  $I_u$  interface in accordance with the invention, there is no MM layer or lower level connection from the serving node, but there is an upper SM (Session Management) level connection to the mobile station. The disconnection of the BM connection over the  $I_u$  interface automatically also brings about a disconnection of the TT connection. During the release of  $I_u$  resources in accordance with the invention a location update is performed in a state-of-the-art manner on the signalling connection without re-establishment of the  $I_u$  connection.

Figure 9 is a block diagram of a first embodiment of a mobile communications system implementing connection management in accordance with the invention as regards the units which are essential to the invention. The figure shows that connection management equipment of a mobile communications system according to the invention which performs disconnection of a logical communication connection between a serving node SGSN and a radio network subsystem RNS during idleness of the connection and reconnection of this communication connection when the traffic activity starts. The connection management equipment is preferably located in connection with the serving node SGSN, as is shown in Figure 9, and/or partly in connection with the mobile station. The connection management equipment includes monitoring equipment 91 for identifying the activity and non-activity of user data traffic on the mobile station's communication

connection, a timer 93 responsive to this monitoring equipment for measuring uninterrupted non-activity in the relaying of user data and state control equipment 95 for releasing the logical communication connection between the serving node SGSN and the radio network subsystem RNS, when a pre-  
5 set time has passed as measured by the timer, and for reconnection of the logical communication connection between the serving node SGSN and the radio network subsystem RNS as the relaying of user data resumes. The control 98 of the timer's setting values is obtained from elsewhere in the network, e.g. as established by the operator from an operation and man-  
10 agement system (O&M). The connection management equipment may also include signalling equipment 97, which is used for signalling information between the serving node SGSN and the mobile station MS on release of the logical communication connection and/or on the need for its reconnection.

15 Figure 10 is a block diagram of a second embodiment of the mobile communications system according to the invention as regards the units which are essential to the invention. The connection management equipment is preferably located in connection with the serving node SGSN, as is shown in Figure 10, and/or partly in connection with the mobile station. In the sec-  
20 ond embodiment of the invention, the connection management equipment includes monitoring equipment 101 for identifying the activity and non-activity of user data traffic on the mobile station's communication connection, resources monitoring equipment 102 for monitoring vacant or busy connection  
25 identifiers of the connections between the serving node SGSN and the radio network subsystem RNS and state control equipment 105 for releasing the logical communication connection between the serving node SGSN and the radio network subsystem RNS, when as indicated by the resources monitoring equipment 102 there is a lack of connection identifiers and when the connection is idle as indicated by the monitoring equipment 101, and for  
30 reconnecting the logical connection between the serving node SGSN and the radio network subsystem RNS as the relaying of user data resumes. The resources monitoring equipment 102 monitors the use of connection identifiers of the transmission network's connections. The connection management equipment may also include signalling equipment 107, which are used for  
35 signalling information between the serving node SGSN and the mobile sta-

tion MS on release of the logical connection and/or on a need for its reconnection.

The drawings and the relating explanation and the names of procedures occurring therein are only intended to illustrate the inventive idea.

- 5 As regards its details the connection management according to the invention may vary within the scope defined by the claims. Although the invention was described above mainly in connection with a 3G mobile system implemented with WCDMA technology, the invention may also be used for some other kind of mobile system, e.g. for a system implemented with TD-CDMA technology.
- 10 The invention is also suitable for use with the type of connectionless connection existing between a trunk network and a radio network, e.g. in a Frame Relay case. The radio network mentioned in this application may be e.g. UTRAN (UMTS Terrestrial Radio Access Network).



### Claims

1. Method of connection management in a mobile communications system, which is suitable for packet switched data transmission and which includes at least one serving node (SGSN), at least one radio network subsystem (RNS), a logical connection between the serving node and the radio network subsystem, and mobile stations (MS), in which mobile communications system the mobile station (MS) has a logical connection with the serving node (SGSN), characterized in that
- 5 a logical connection is released between the serving node (SGSN) and the radio network subsystem (RNS) so that the logical connection remains between the serving node (SGSN) and the mobile station (MS), and the logical connection is reconnected between the serving node (SGSN) and the radio network subsystem (RNS) when transmission of user data begins.
- 10 2. Method as defined in claim 1, characterized in that the logical connection is released between the serving node (SGSN) and the radio network subsystem (RNS), when mobile communications on the connection have been idle for a pre-established time.
3. Method as defined in claim 2, characterized in that the pre-established time is set for the connection based on the service class.
- 20 4. Method as defined in claim 1, characterized in that the logical connection is released between the serving node (SGSN) and the radio network subsystem (RNS), when a shortage of resources occurs on this transmission distance and the connection is idle.
- 25 5. Method as defined in claim 1, characterized in that information on release of the logical connection is signalled between the serving node (SGSN) and the mobile station (MS).
6. Method as defined in claim 1 or 5, characterized in that information on the need for reconnection of the logical connection is signalled between the serving node (SGSN) and the mobile station (MS).
- 30 7. Method as defined in claim 1, characterized in that release of the logical connection between the serving node (SGSN) and the radio network subsystem (RNS) is prevented, when some unit in the mobile communications system has such user data, which is intended for relaying over this connection.
- 35

8. Method as defined in any claim 1-3, characterized in that the connection of the mobility management protocol (MM) is released between the serving node (SGSN) and the radio network subsystem (RNS), so that the connection of the upper level connection protocol (SM) between the serving node (SGSN) and the mobile station (MS) remains.

9. Mobile communications system, which is suitable for packet-switched data transmission and which includes at least one serving node (SGSN), at least one radio network subsystem (RNS), a logical connection between the serving node and the radio network subsystem and mobile stations (MS), in which mobile communications system the mobile stations (MS) have a logical connection with the serving node (SGSN), characterized in that the mobile communications system includes

connection management equipment for releasing the logical connection between the serving node (SGSN) and the radio network subsystem (RNS) during non-activity of the connection and for reconnecting this logical connection, when traffic activity starts.

10. Mobile communications system as defined in claim 9, characterized in that the connection management equipment includes

monitoring equipment (91) for identifying activity and non-activity of the user data traffic on the mobile station's communication connection,

at least one timer (93) for measuring an uninterrupted non-activity period in the relaying of user data, and

state control equipment (95) for releasing the logical connection between the serving node (SGSN) and the radio network subsystem (RNS), when a pre-established time has passed as measured by the timer, and for reconnecting the logical connection between the serving node (SGSN) and the radio network subsystem (RNS), when the relaying of user data resumes.

11. Mobile communications system as defined in claim 10, characterized in that an operation and management system (O&M) controls setting of the timer (93).

12. Mobile communications system as defined in claim 10 or 11, characterized in that the timer's setting depends on the service class.

13. Mobile communications system as defined in claim 10 or 11, characterized in that the connection management equipment also includes signalling equipment (97) for signalling of the release and recon-

nection of the logical connection between the serving node (SGSN) and the mobile station (MS).

14. Mobile communications system as defined in claim 9, c h a r -  
a c t e r i z e d in that the connection management equipment includes  
5 monitoring equipment (101) for identifying activity and non-activity  
of the user data traffic on the mobile station's communication connection,  
resources monitoring equipment (102) for monitoring the degree  
of reservation of the connection identifiers of connections between the serv-  
ing node (SGSN) and the radio network subsystem (RNS), and  
10 state control equipment (105) for releasing the logical connection  
between the serving node (SGSN) and the radio network subsystem (RNS),  
when there is a shortage of connection identifiers and the connection is idle,  
and for reconnecting the logical connection between the serving node  
(SGSN) and the radio network subsystem (RNS), when relaying of user data  
15 resumes.

15. Mobile communications system as defined in claim 14, c h a r -  
a c t e r i z e d in that the connection management equipment also includes  
signalling equipment (107) for signalling of release and reconnection of the  
logical connection between the serving node (SGSN) and the mobile station  
20 (MS).

Fig. 1

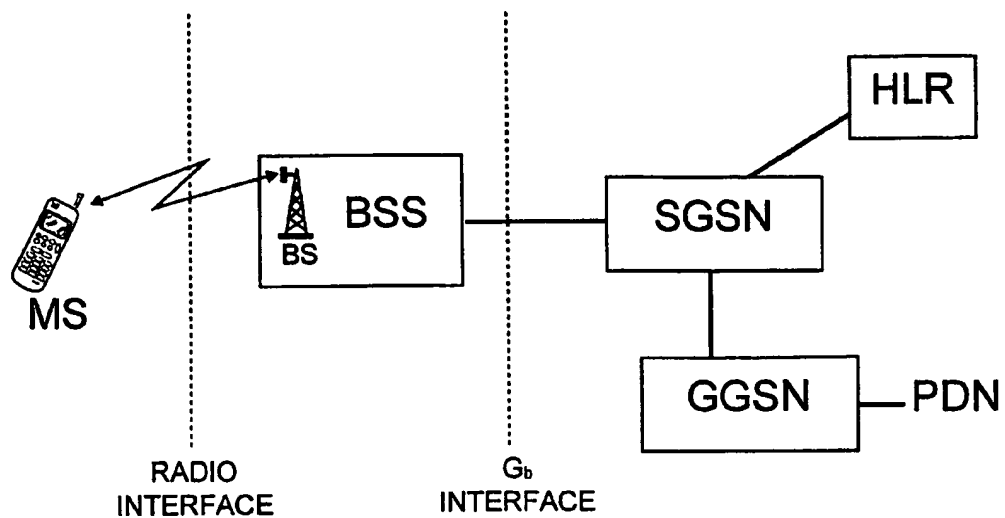


Fig. 2

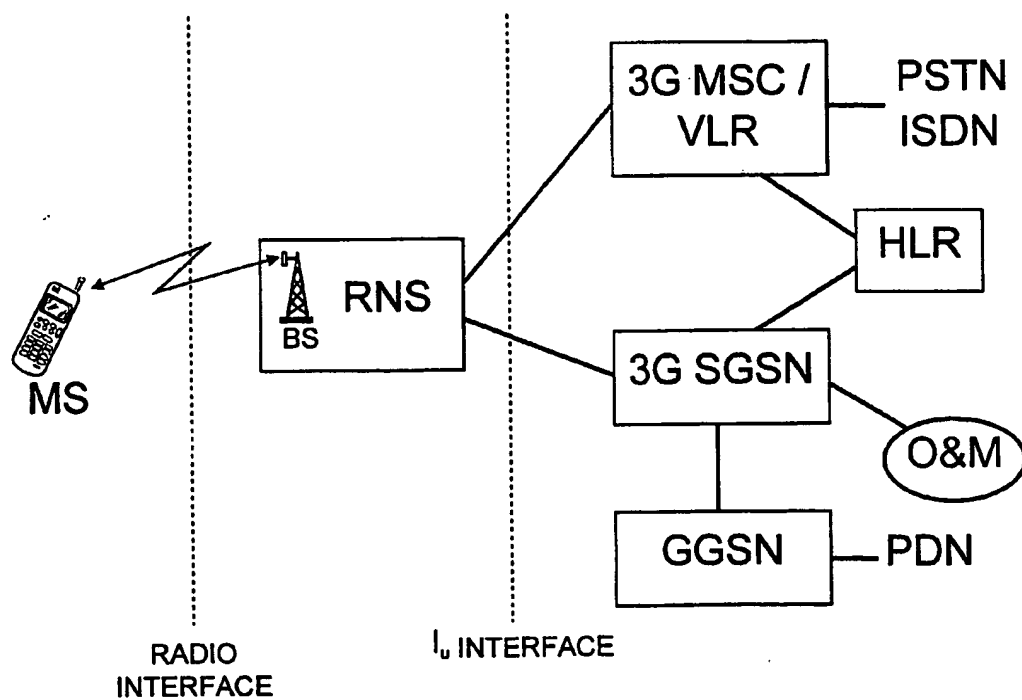


Fig. 3

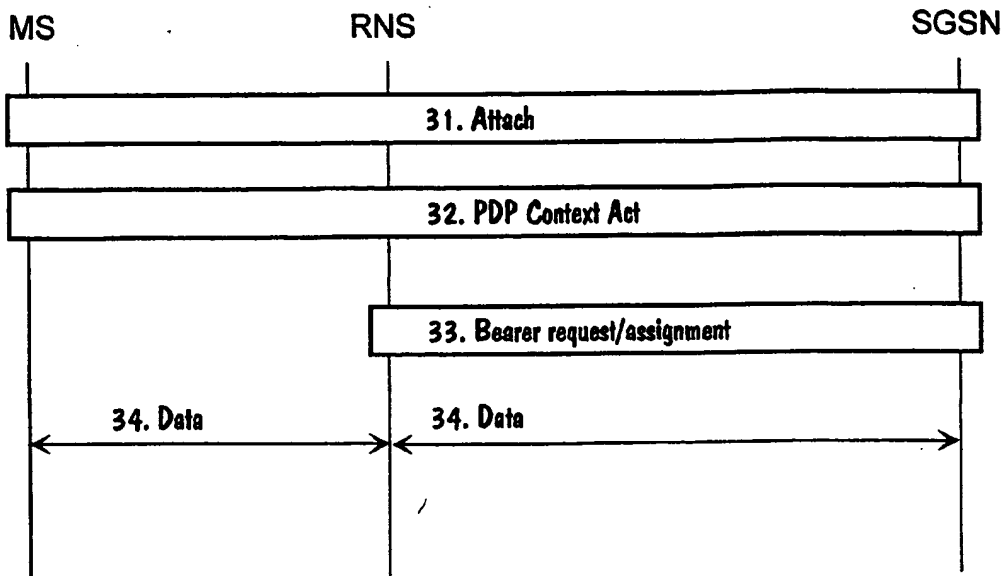


Fig. 4


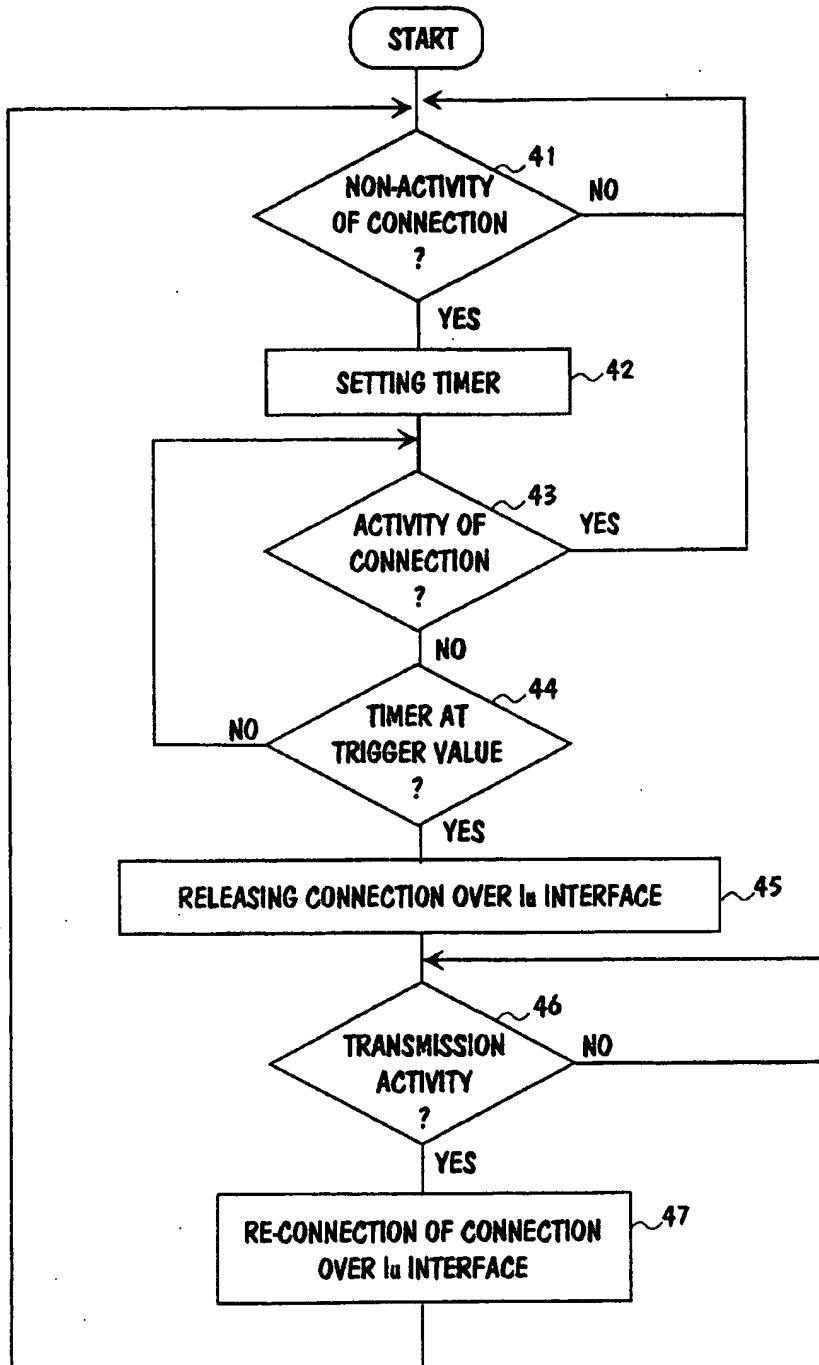


Fig. 5

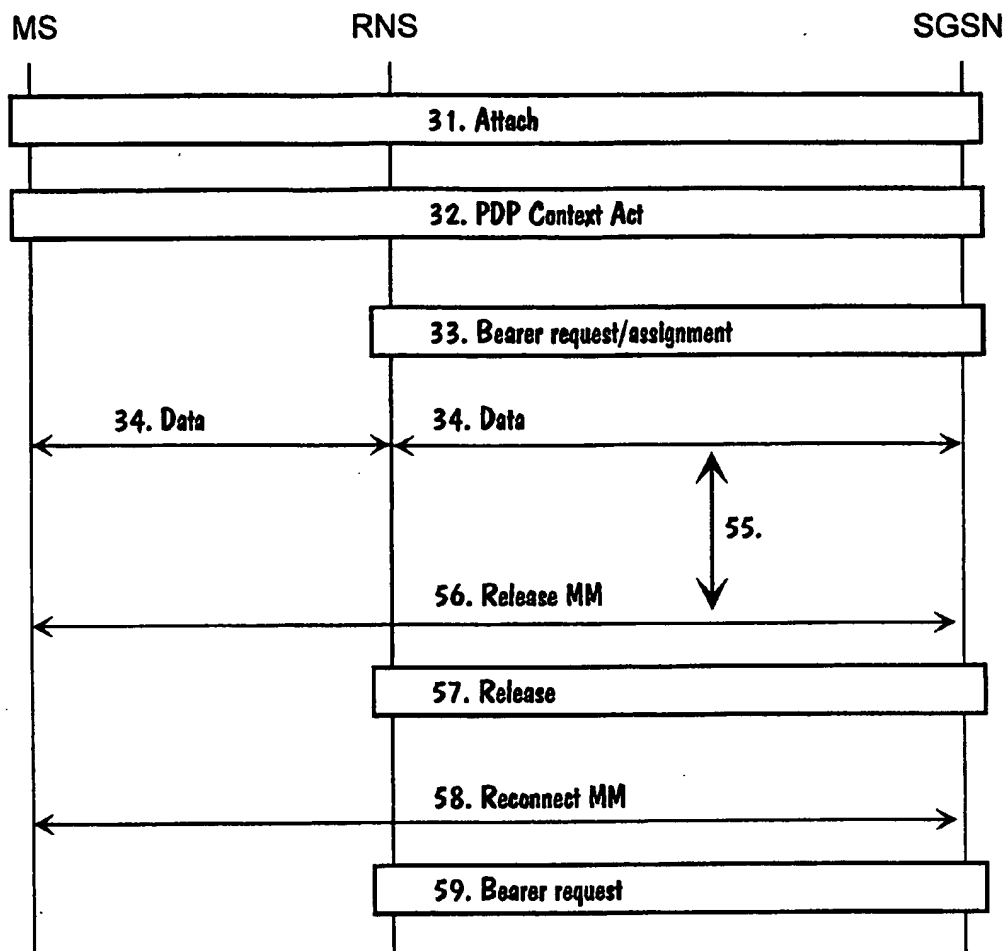

5/7

Fig. 6


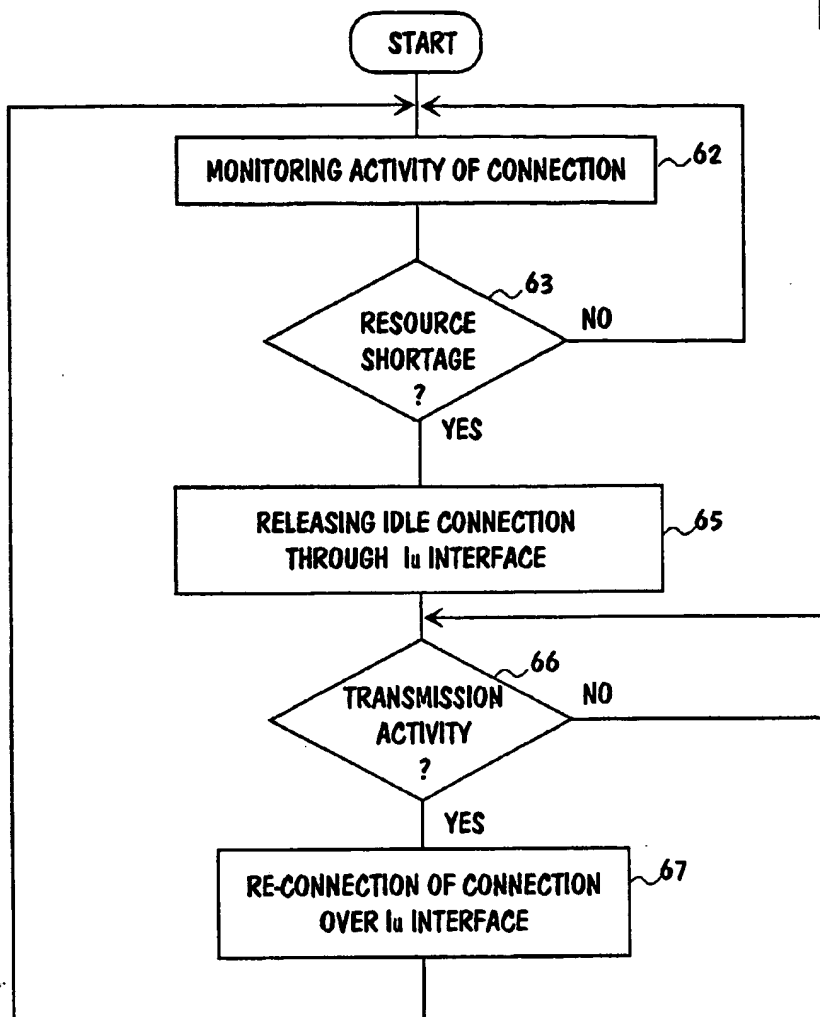


Fig. 7





6/7

Fig. 8

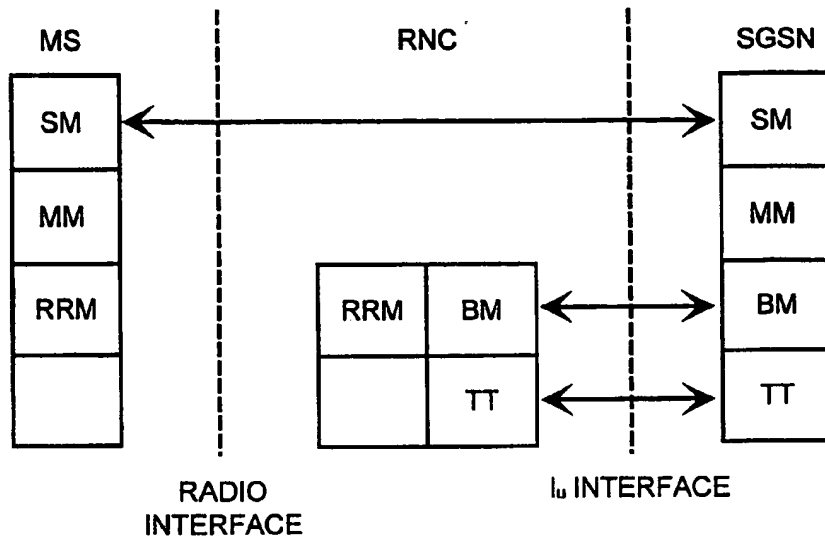


Fig. 9


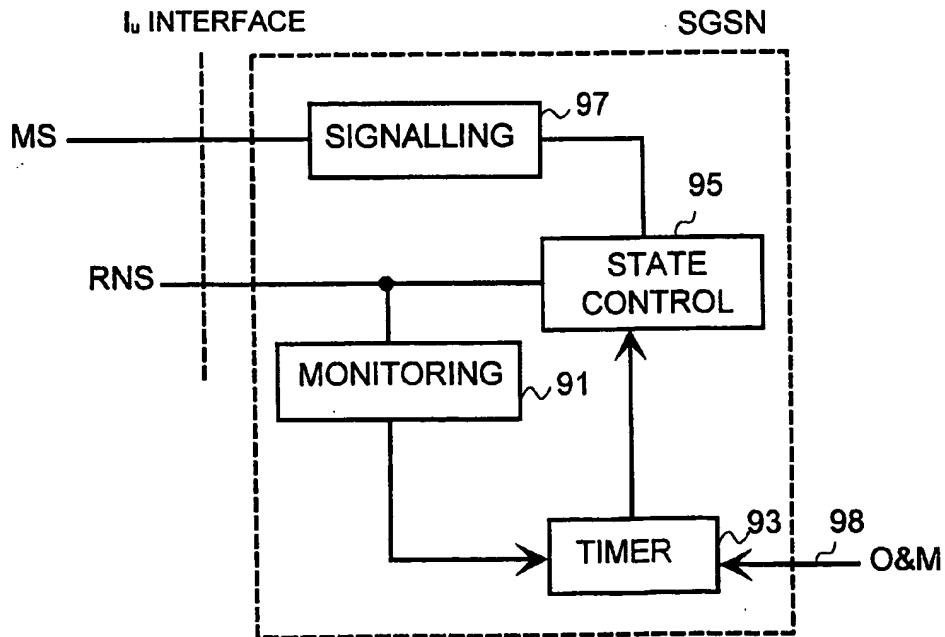


Fig. 10

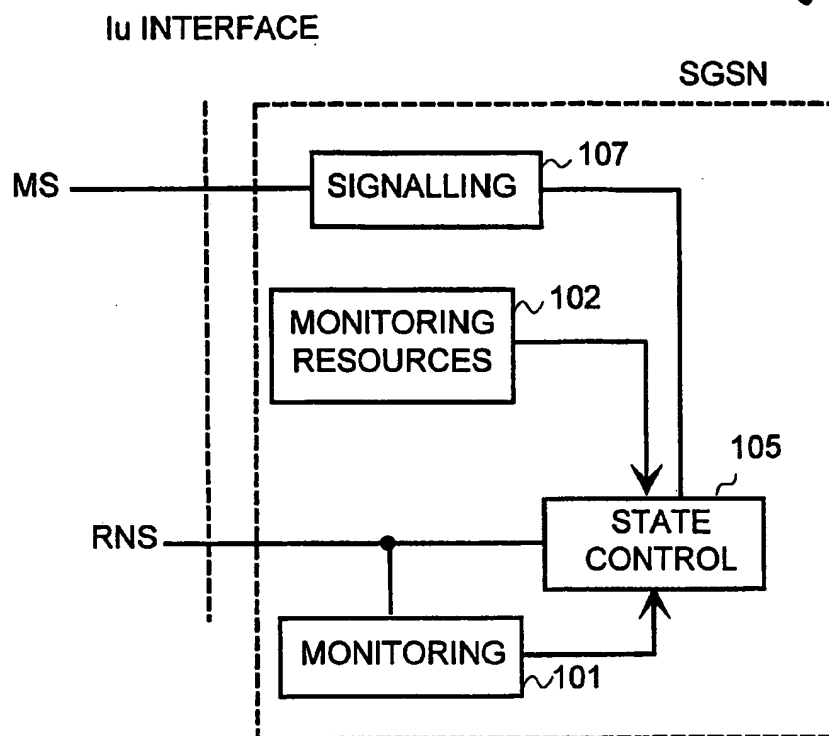

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/00564

| <b>A. CLASSIFICATION OF SUBJECT MATTER</b>  |  |  |
|---|--|--|
| IPC7: H04Q 7/22, H04Q 7/38<br>According to International Patent Classification (IPC) or to both national classification and IPC   |  |  |
| <b>B. FIELDS SEARCHED</b>   |  |  |
| Minimum documentation searched (classification system followed by classification symbols)   |  |  |
| IPC7: H04Q  |  |  |
| Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched   |  |  |
| SE,DK,FI,NO classes as above  |  |  |
| Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  |  |  |
| <b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>   |  |  |
| Category*   | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No.  |
| A   | US 5745695 A (PHILIP GILCHRIST ET AL),<br>28 April 1998 (28.04.98), column 3,<br>line 27 - column 4, line 7<br><br>--      | 1-2,5-6,9  |
| A   | US 5708656 A (JOHN NONEMAN ET AL), 13 January 1998<br>(13.01.98), column 1, line 46 - column 3, line 21<br><br>--<br>----- | 1-2,9-10   |
| <input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.  |  |  |
| * Special categories of cited documents:<br>"A" document defining the general state of the art which is not considered to be of particular relevance<br>"E" earlier document but published on or after the international filing date<br>"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)<br>"O" document referring to an oral disclosure, use, exhibition or other means<br>"P" document published prior to the international filing date but later than the priority date claimed<br>"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention<br>"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone<br>"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art<br>"&" document member of the same patent family |  |  |
| Date of the actual completion of the international search   |  | Date of mailing of the international search report                         |
| 6 December 1999   |  | 10-12-1999   |
| Name and mailing address of the ISA/<br>Swedish Patent Office<br>Box 5055, S-102 42 STOCKHOLM<br>Facsimile No. +46 8 666 02 86  |  | Authorized officer<br><br>Jaana Raivio/cs<br>Telephone No. +46 8 782 25 00 |

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

02/11/99

International application No.

PCT/FI 99/00564

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|---|---------------------|----------------------------|---------------------|
| US 5745695 A                              | 28/04/98            | NONE                       |                     |
| US 5708656 A                              | 13/01/98            | EP 0830040 A               | 18/03/98            |